

(19) World Intellectual Property
Organization
International Bureau



543112

(43) International Publication Date
5 August 2004 (05.08.2004)


PCT

(10) International Publication Number
WO 2004/065175 A1

- (51) International Patent Classification⁷: **B60R 11/02**, H04M 1/04
- (21) International Application Number: PCT/EP2003/014680
- (22) International Filing Date: 27 November 2003 (27.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 03001560.6 23 January 2003 (23.01.2003) EP
- (71) Applicant (for all designated States except US): SONY ERICSSON MOBILE COMMUNICATIONS AB [SE/SE]; Nya Vattentornet, S-221 88 Lund (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MOLLINARI, Maurizio [IT/IT]; Viale Pasteur, 5, I-00144 Roma (IT).
- (74) Agent: KÖRBER, Martin; Mitscherlich & Partner, Sonnenstrasse 33, 80331 München (DE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: HOLDER FOR A CLAMSHELL-TYPE MOBILE PHONE

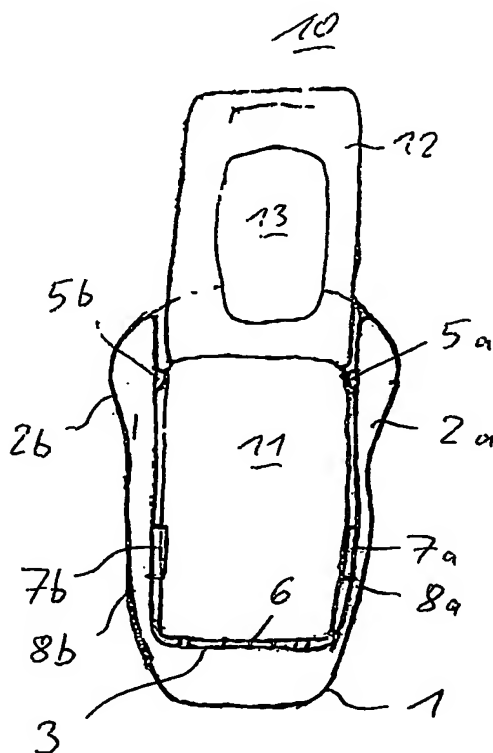

(57) Abstract: The present invention relates to a holder (1) for a clamshell-type mobile phone (10) with a first part (11) and a second part (12) connected to each other and foldable onto each other by a hinge means (14), said holder (1) comprising a holding structure having a left and a right sidewall (2a, 2b) for releasably holding said first part (11) of the mobile phone (10) and a lower sidewall (3) with a connector (16) for a connection to a corresponding connector (15) of the mobile phone (10), whereby said left and right sidewall (2a, 2b) respectively comprise a protruding element (5a, 5b) protruding towards the inside of the holding structure and adapted to engage into respectively apertures (17) of the hinge means (14) of the mobile phone (10).

WO 2004/065175 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

22 JUL 2005

Holder for a clamshell-type mobile phone

The present invention relates to a holder for a clamshell-type mobile phone, specifically a holder that can be used as a car cradle for receiving and holding a clamshell-type mobile phone in an automobile or car.

Such holders for mobile terminals or car cradles are generally known in the state of the art. Such holders are normally fixedly connected to the loudspeaker and radio system of the car interior as well as to an external antenna and to a microphone for picking up acoustic speech information from the driver or one of the passengers. Hereby, a driver can have a telephone communication without having to hold the mobile phone to his or her ear. Usually, the holder or car cradle comprises a snap-in mechanism or clamping mechanism or the like, so that a mobile phone is securely fixed but can be released in an easy and simple manner by pushing a button or the like. However, such holders known in the prior art are only able to accommodate normal mobile phones and not clamshell-type mobile phones. A clamshell-type mobile phone is a telephone comprising a first part and a second part, whereby the first part and the second part are connected to each other via a hinge means and whereby the first and the second part can be folded together and on top of each other so that the size of the mobile phone is significantly reduced while the phone is carried around. In order to activate the speech functions or other functions of the mobile phone, the first part and the second part are flipped open. Such type of mobile phones usually have to be flipped open in order to enable a telephone conversation.

The object of the present invention is therefore to provide a holder for a clamshell-type mobile phone which ensures a simple but reliable accommodation of a clamshell-type mobile phone in its flipped open state.

The above object is achieved by a holder for a clamshell-type mobile phone according to claim 1. The mobile phone has a first part and a second part connected to each other and foldable onto each other by a hinge means. The holder according to the present invention comprises a holding structure having a left and a right sidewall for releasably holding said first part of the mobile phone and a lower wall with a connector for a connection to a corresponding connector of the mobile phone,

whereby the left and the right sidewall respectively comprise a protruding element protruding towards the inside of the holding structure and adapted to engage into respective apertures of the hinge means of the mobile phone.

Hereby, the clamshell-type mobile phone can be easily connected to the holder by connecting the connector of the mobile phone to the connector of the holder on the lower wall and then by locking the mobile phone into the holding structure by pressing the mobile phone between the left and right sidewall so that the respective protrusion enters the apertures or openings in the hinge means. Hereby, a firm and reliable phone retention and accommodation is ensured in a simple way.

Advantageously, the protruding elements are made of an elastic material, such as thermoplastic rubber, so that the surface and casing of the mobile phone is not scratched when the phone is inserted in the holding structure. Further, the sidewalls can be made of an elastic material so that the clamping of the mobile phone into the holding structure and the releasing of the mobile phone from the holding structure can be achieved by simply bending one of the sidewalls or both sidewalls outwardly, so that the mobile phone can be taken out easily.

Advantageously, the connector on the lower wall of the holding structure is at the same time a data input/output connector to be connected to a corresponding data input/output connector of the mobile phone. Hereby, the input/output connector of the holding structure advantageously projects from the lower wall and engages into a corresponding input/output connector aperture of the mobile phone when the phone is inserted in the holding structure. Hereby, by means of a slight pivoting movement, the phone, after the input/output connectors have been connected, is pivoted inbetween the sidewalls so that the protrusions can engage into the aperture of the hinge means on both sides of the mobile phone. By this slight pivotal movement, the mobile phone is further advantageously connected to an RF connector projecting from a backwall of the holding structure in order to connect the mobile phone to an external antenna.

Further advantageously, the supporting structure comprises an upper support for the second part of the mobile phone in its flipped-open position. This support ensures that the mobile phone can rest in its flipped open position while being accommodated in the holding structure. In an advantageous embodiment, the sidewalls with the protruding elements as well as the support are formed so that the second part of the mobile phone can be flipped onto the first part while being held in the holding structure, so that the mobile phone can be closed while being held.

Further advantageously, the holding structure comprises a lower right and a lower left sidewall between the lower wall and the left and the right sidewall, respectively. The lower sidewalls respectively comprise additional protruding elements protruding to the inside. These additional protruding elements can additionally secure the first part of the mobile phone in the holding structure. Advantageously, these additional protruding elements are of an elastic material, such as rubber.

The present invention also comprises a combination of a holder as described above with a clamshell-type mobile phone comprising respective apertures as the hinge means connecting the first part and the second part of the mobile phone. Hereby, the hinge means can be a single hinge extending across the entire width of the mobile phone or can consist of two separate hinges on the left and the right side of the mobile phone. However, the hinge axis of the hinge or both hinges are recessed towards the inside so that an aperture is formed in to which the protrusions of the sidewalls of the holding structure can engage. Additionally, the hinge means may advantageously comprise guiding means to ensure that the protrusions are correctly guided into the apertures upon inserting the mobile phone into the holding structure. Hereby, a correct alignment is ensured so that upon inserting the mobile phone into the holding structure, the connector means of the phone and the holding structure can first be connected, whereafter the phone is guided with a slight pivotal movement into the holding structure under the assistance of the guiding means. The guiding means at the same time ensure that a correct alignment and connection of the RF plug projecting from the backwall of the holding structure into a corresponding socket in the backwall of the mobile phone is ensured. Thus, the combination of the connectors, the guiding means, the protrusions and the apertures ensure a proper vertical alignment when the phone is inserted into the holding structure. This guiding can be further supported by the additional protruding elements on the lower sidewalls in co-operation with corresponding recesses in the sidewalls of the mobile phone. Hereby, at the beginning of the insertion of the mobile phone, the recesses of the mobile phone are engaged by the additional protruding elements. Towards the end of the inserting procedure, the additional protruding elements leave the recesses and clamp the mobile phone by pressing against the sidewalls of the mobile phone.

An advantageous embodiment of the present invention is explained in the following description in relation to the enclosed drawings, in which

Fig. 1 shows a schematic top view onto a clamshell-type mobile phone inserted into a holder according to the present invention,

Fig. 2 shows a cross-section of the lower side walls and a first part of a mobile phone

Fig. 3 shows a schematic side view of a holder according to the present invention while a mobile phone is being inserted,

Fig. 4 shows a schematic side view of a holder according to the present invention into which a clamshell-type mobile phone in a flipped-open state is fully inserted,

Fig. 5 shows an enlarged schematic view of the hinge means connecting the first and the second part of the clamshell-type mobile phone and

Fig. 6 shows schematically a recess on the first part of the mobile phone for the co-operation with the additional protruding elements of the holding structure.

Fig. 1 schematically shows a top view of a holder 1 according to the present invention, into which a clamshell-type mobile phone 10 is inserted. The holder 1 consists essentially of a plastic material.

The holder 1 is adapted to receive and accommodate a clamshell-type mobile phone 10 comprising a first part 11 and a second part 12. The first part 11 and the second part 12 of the mobile phone 10 are connected to each other with a hinge 14 as e.g. shown in Figs. 3 and 5. The first part 11 of the mobile phone 10 usually comprises a keyboard and the second part 12 of the mobile phone 10 usually comprises a display. The holder 1 of the present invention is adapted to receive the clamshell-type mobile phone 10 in a flipped-open state as shown in Fig. 1.

Important elements for holding the mobile phone 10 are the right sidewall 2a and the left sidewall 2b, whereby the directions right and left are not limiting and only related to the view in Fig. 1. The sidewalls 2a and 2b extend upwardly from a backwall 4 of the holder 1. The lower part of the holder 1 is formed by a lower wall 3 comprising a data input/output connector 6 to be connected with a corresponding data input/output connector aperture of the mobile phone 10. The lower wall 3 can comprise further holding pins projecting to the inside adapted to engage into corresponding holes in the mobile phone so that additional holding stability is ensured.

When the phone is to be inserted into the holder 1, the lower side of the first part 11 of the mobile phone 10 is connected with the data input/output connector 6 whereafter the phone is pressed with a slight pivotal movement between the sidewalls 2a and 2b. Each sidewall 2a, 2b, respectively, comprises a protrusion 5a, 5b, i.e. a thermoplastic knob pointed to the inside of the holder 1. The protrusions 5a and 5b are adapted to engage into respective apertures 17 formed in the hinge 14 connecting the first and the second part of the mobile phone 10.

Fig. 3 shows a schematic sideview of the first step of the insertion of the mobile phone 10 into the holder 1, namely after the data input/output connector 6 of the holder 1 had been inserted into the data input/output connector aperture 15 of the mobile phone but before the protrusions 5a and 5b engage into the apertures 17 of the hinges 14. This insertion movement is supported by additional protrusions 7a and 7b, respectively extending inwards from lower sidewalls 8a and 8b of the holder 1. These additional protrusions engage into recesses 16a and 16b on both sides of the first part 11 of the mobile phone 10 at the beginning of the insertion step as shown in Fig. 3. Hereby, a proper vertical alignment of the mobile phone 10 in the holder 1 is ensured, so that an RF plug extending from the backwall 4 of the holder 1 is correctly connected to and inserted in an RF connection socket 20 on the backside of the mobile phone 10.

Fig. 4 shows a schematic sideview of the mobile phone 10 being fully inserted into the holder 1, i.e. in a state in which the protrusions 5a and 5b engage the apertures 17 in the hinge 14. Also, the RF plug 9 is properly inserted in the RF socket 20. The additional protrusions 7a and 7b have, in this fully inserted state, left the recessions 16a and 16b, respectively, and provide additional clamping of the first part 11 of the mobile phone 10 as shown in the cross-section in Fig. 2.

In Fig. 5, a schematic view of the hinge 14 connecting the first and the second part of the mobile phone 10 is shown with additional guiding means 18 and 19 for guiding the respective protrusion 5a or 5b into the aperture 17 of the hinge 14. Hereby, the guide means 18 and 19 are e.g. formed by small wall structures having a opening into which a protrusion 5a or 5b enters and is guided towards the aperture 17 by the approaching wall structures 18, 19. The aperture 17 is formed by a recession of the hinge axis 14. This enables that the mobile phone 10, while being held in the holder 1, can still be opened or closed without problem. As shown in Fig. 4, second part 12 of the mobile phone 10, in the flipped-open and inserted state, is supported by a support structure 21 extending upwardly from the backwall 4.

Fig. 6 shows a schematic respective view of the first part 11 of the mobile phone with the recession 16b for the co-operation with the additional protrusion 7b.

It has to be noted, that the entire holder 1 is advantageously made of plastics, but can be made of any other material. The protrusions 5a, 5b and the additional protrusions 7a, 7b are advantageously made of an elastic material, such as thermoplastic rubber, in order to ensure that the phone casing or other parts are not damaged while the phone 10 is being inserted into the holder 1. Further, the holder 1 can have a certain elasticity around a vertical axis or the sidewalls, so that the mobile phone can be easily removed from the holder 1 by bending the sidewalls 2a and 2b and the lower wall parts 8a and 8b away from each other. Hereby, the sidewalls 2a and 2b and the lower walls parts 8a and 8b can be formed and operate as springs clamping the phone into the holder 1 after insertion but allowing for an easy removal of the phone 10 when bent away from each other by a user.

Claims

1. Holder (1) for a clamshell-type mobile phone (10) with a first part (11) and a second part (12) connected to each other and foldable onto each other by a hinge means (14),

said holder comprising

a holding structure having a left and a right sidewall (2a, 2b) for releasably holding said first part (11) of the mobile phone (10) and a lower sidewall (3) with a connector (8) for a connection to a corresponding connector (15) of the mobile phone (10),

whereby said left and right sidewall (2a, 2b) respectively comprise a protruding element (5a, 5b) protruding towards the inside of the holding structure and adapted to engage into respectively apertures (17) of the hinge means (14) of the mobile phone (10).

2. Holder for a clamshell-type mobile phone according to claim 1,
characterised in,

that the protruding elements are made of an elastic material.

3. Holder for a clamshell-type mobile phone according to claim 1 or 2,
characterised in,

that the left and right sidewall (2a, 2b) are formed as elastic elements in order to exert a clamping force on a mobile phone (10) inserted in the holding structure.

4. Holder for a clamshell-type mobile phone according to one of the claims 1, 2 or 3,
characterised in,

that the connector of the holder (1) is a data input/output connector protruding from the lower wall (3).

5. Holder for a clamshell-type mobile phone according to one of the claims 1 to 4,
characterised in,

that lower sidewalls (8a, 8b) are provided between the sidewalls (2a, 2b) and the lower wall (3), respectively, said lower sidewalls (8a, 8b) respectively comprising an

additional protruding element (7a, 7b), for clamping the first part (11) of a mobile phone (10) in the holding structure.

6. Holder for a clamshell-type mobile phone according to claim 5, **characterised in,**
that the additional protruding elements (7a, 7b) are made of an elastic material.

7. Holder for a clamshell-type mobile phone according to claim 5 or 6, **characterised in,**
that the lower walls (8a, 8b) are formed as elastic elements for exerting a clamping force on a mobile phone (10) inserted into the holding structure.

8. Holder for a clamshell-type mobile phone according to one of the claims 1 to 7, **characterised in,**
that a support wall is provided for the second part of a mobile phone (10) inserted into the holding structure and being in a flipped-open state.

9. Combination of a holder according to one of the claims 1 to 8 and a clamshell-type mobile phone (10) with a first part (11) and a second part (12) connected to each other and foldable onto each other by a hinge means (14), whereby the hinge means (14) comprises apertures (17) into which the protruding elements (5a, 5b) of the holder (1) can engage upon connecting the mobile phone (10) to the holder (1).

10. Combination of a holder and a mobile phone according to claim 9, **characterised in,**
that the hinge means (14) of the mobile phone (10) comprise guiding means (18, 19) for guiding the protruding elements (5a, 5b) of the sidewalls (2a, 2b) into the apertures (17) of the hinge means (14).

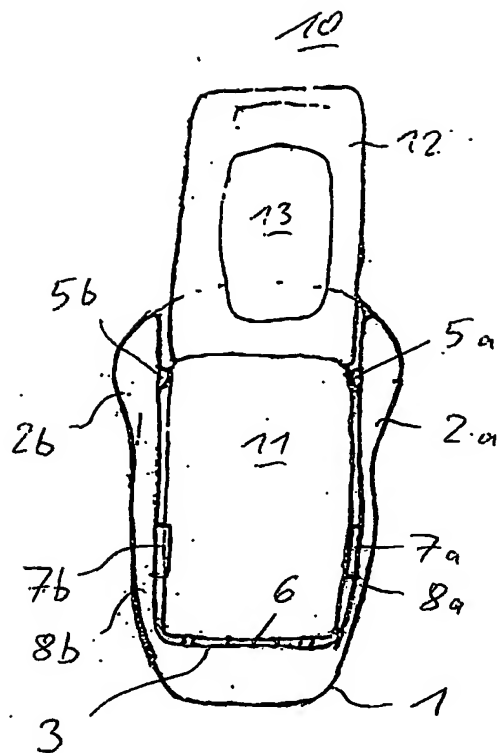


FIG.1

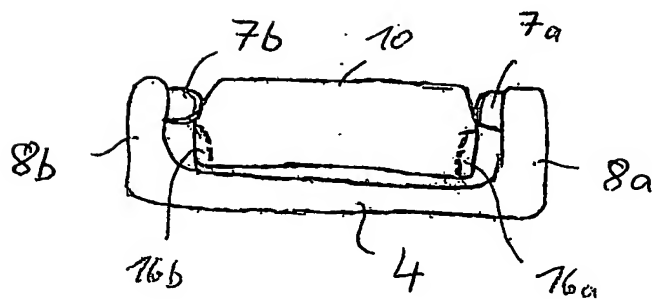


FIG.2

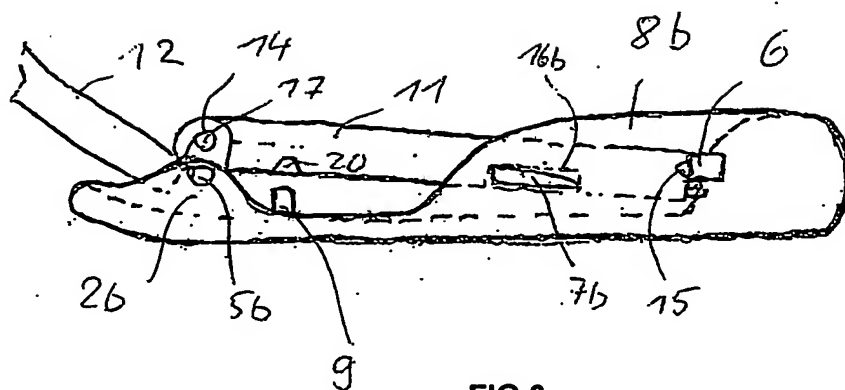


FIG.3

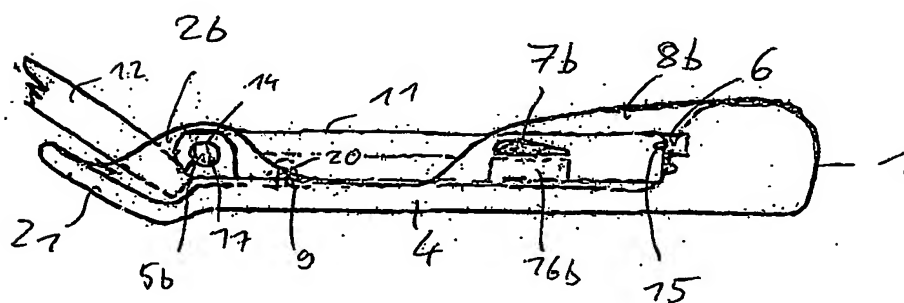


FIG.4

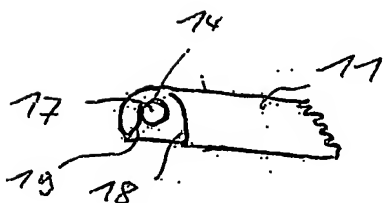


FIG.5

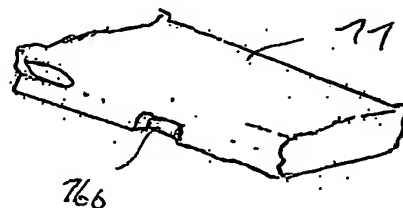


FIG.6

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60R11/02 H04M1/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B60R H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 189 358 A (MATSUMOTO YOSHIHIRO ET AL) 23 February 1993 (1993-02-23) column 4, line 55 -column 5, line 38 column 6, line 55-64; figures 1-5	1,9
A	US 6 009 168 A (HANNON JOHN FRANCIS ET AL) 28 December 1999 (1999-12-28) column 5, line 23-57; figures 1,3-6,9	1,9
A	EP 0 980 792 A (NOKIA MOBILE PHONES LTD) 23 February 2000 (2000-02-23) paragraphs '0011!-'0015!; figures 4A-4D	1,9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 April 2004

Date of mailing of the international search report

23/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Plenk, R

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5189358	A	23-02-1993	JP	4354231 A	08-12-1992
			JP	4331543 A	19-11-1992
US 6009168	A	28-12-1999	CN	1179695 A ,B	22-04-1998
			FR	2753865 A1	27-03-1998
			GB	2317530 A ,B	25-03-1998
			JP	10126478 A	15-05-1998
EP 0980792	A	23-02-2000	US	6141417 A	31-10-2000
			EP	0980792 A1	23-02-2000